

# HIGH DENSITY FIBER OPTICAL PATCH PANEL(3U)

LFPM03-288

Version: 03/20



Color: Black

19-inch standard cabinet

## DESCRIPTION

Applicable to the fiber termination point in the fiber access network. The function of wiring and splicing realize flexible wiring and storage of fiber cable core. Specially designed for optical fiber communication room. Suitable for standard 19" cabinet.

## FEATURES

- Size: 525 x 435 x 188 mm
- Made of high quality cold-rolled steel, with surface nish of degreasing, pickling, phosphoric, powder coating. The thickness of powder coating is 80-100μm, complying with RoHs
- With cable management and clear labels, it is easy to install and to manage
- More than four times the density of traditional patch panels, greatly saving cabinet space and improve the utilization of cabinet, creating value for the construction of a modular data center architecture and upgrade the maintenance of cabling facilities
- Splicing capacity: 3U fiber optical shelf loads max.288cores.
- Full equipped LC adapter and fiber splice tray

## ORDER INFORMATION

	NUMBER (pcs)	WEIGHT (kg)	DEPTH (cm)	WIDTH (cm)	HEIGHT (cm)	PART. NO
Package (1 Carton)	1	7.5	52.5	43.5	18.8	LFPM03-288


# HIGH DENSITY FIBER OPTICAL PATCH PANEL(3U)

LFPM03-288

Version: 03 / 20



## TECHNICAL DRAWINGS

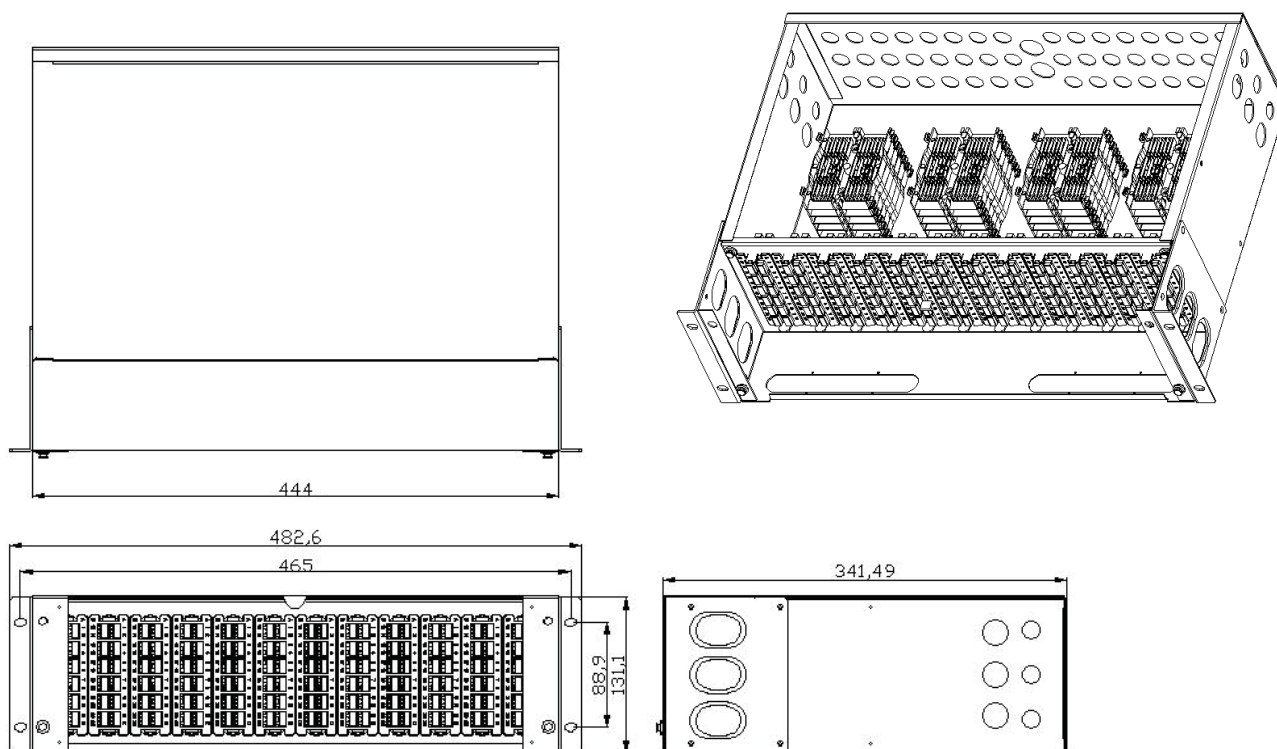

keep stable