

# CAT6 SHIELDED KEYSTONE JACKS



LKS119-C6S

Version: 03/20



Cat. 6A 500 MHz 10 GBase-T

Design compatible

Toll free

Shielded

## DESCRIPTION

This series keystone jacks work together with high speed cables, cords and panels to provide performance beyond proposed Category 6A standards, a new feature of this series jack is a universal colored wiring label that eliminates the need for separate codes for T568A/B wiring scheme.

## FEATURES

- Color: Grey / Black
- Depth: 35.1 x 14.5 x 18.4 mm
- T568A/B wiring, meet or exceed TIA/EIA Cat6A requirements
- Overall zinc alloy shielding design meets the industry standards
- Compact jack design, 8 positions and 8 conductors
- Contact : phosphor bronze , phosphor bronze with 6 to 50µ" gold plate
- Accept 22-26 AWG solid with a insulation diameter of 0.4-0.6 mm
- Easy to be terminated, low attenuation loss and high return loss
- High reliability and superior performance
- Available in different colors
- Toll free installation
- RJ45- Jack, 8P8C
- Insertion force: Max: 30 N (acc. IEC60603-7-5)
- Category 6 10 G Base-T, 500 MHz
- ISO/IEC 11801 3 rd Edition, EN50173-1
- Suitable for PoE/PoE+ (IEE 803.af, 3at)

# CAT6 SHIELDED KEYSTONE JACKS




LKS119-C6S

Version: 03/20

## ORDER INFORMATION

	NUMBER (pcs)	WEIGHT (kg)	DEPTH (cm)	WIDTH (cm)	HEIGHT (cm)	PART. NO
Package (1 Carton)	250	6.5	31	53	23	LKS119-C6S

## TECHNICAL DRAWINGS

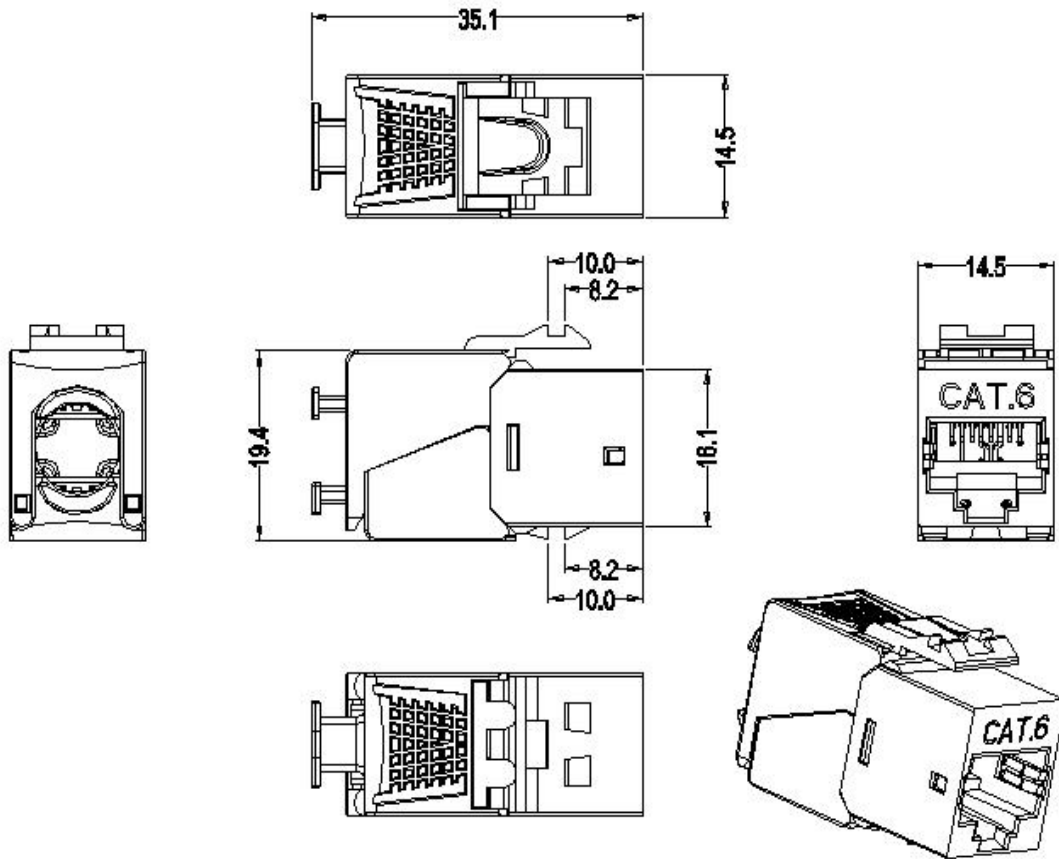

## CONSTRUCTION

DESCRIPTION	PARAMETER
Contact resistance (max)	20mΩ
Insulation resistance(min)	500MΩ
Return loss(dB)	5.9dB


# CAT6 SHIELDED KEYSTONE JACKS



LKS119-C6S

Version: 03/20

## FLUKE TEST

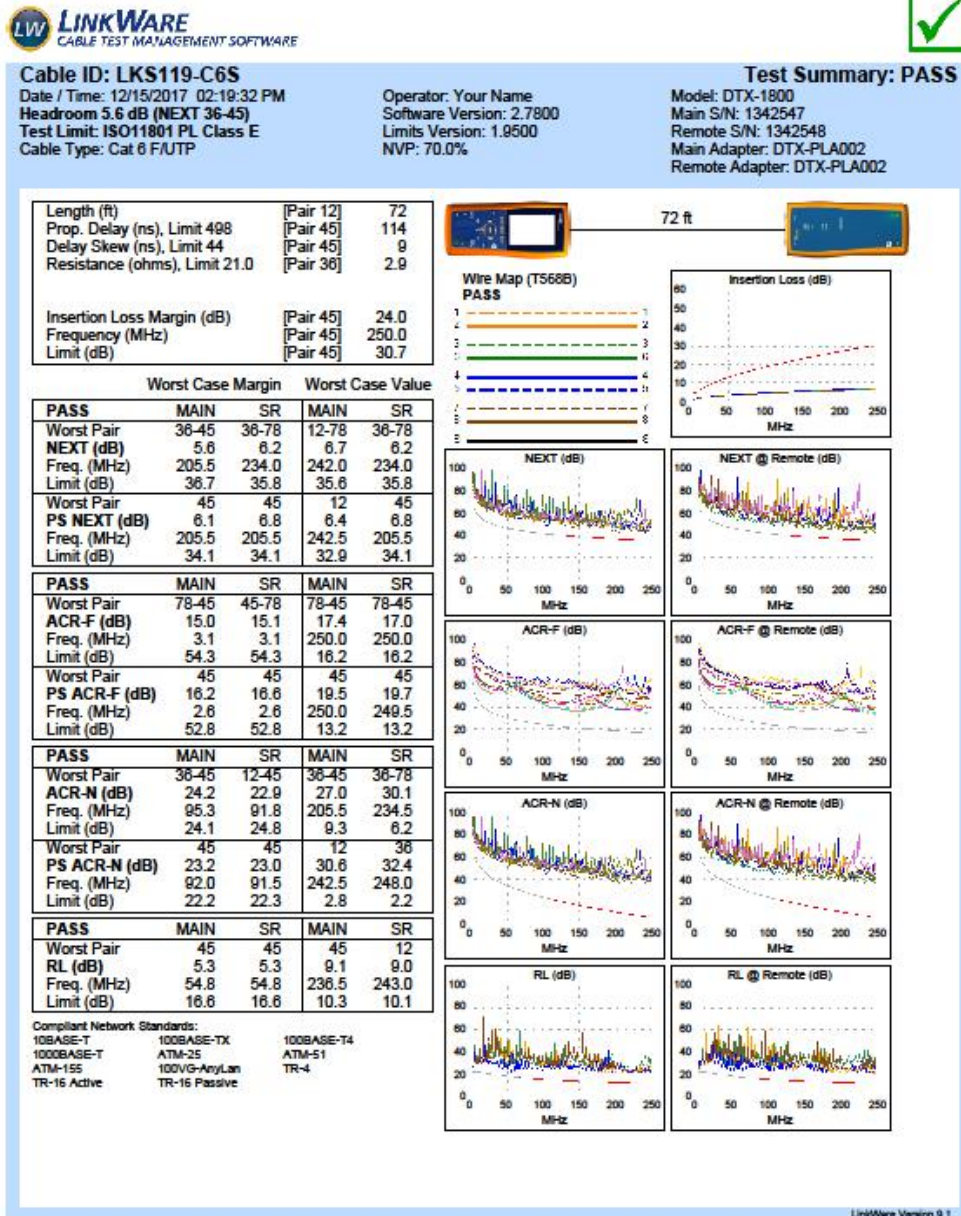

keep stable